

Fixed Coaxial Attenuators

Model 41 Medium Power, SMA Connectors Bi-directional Design

dc to 18.0 GHz
 10 Watts



Features

- /// **Compact Construction** - Lowest size/power ratio.
- /// **Quality Connectors with special high temperature support beads.**
- /// **Designed to meet environmental requirements of MIL-DTL-3933.**


Specifications

NOMINAL IMPEDANCE: 50 Ω

FREQUENCY RANGE: dc to 18.0 GHz

MAXIMUM DEVIATION OVER FREQUENCY:


Nominal ATTN (dB)	Deviation (dB)
1, 2	± 0.50
3, 6	± 0.30
10	± 0.50
20	± 0.70
30	± 1.00

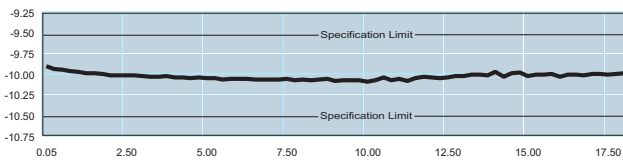

Typical Attenuation Accuracy

MAXIMUM SWR:

Frequency (GHz)	SWR
dc - 8	1.20
8 - 12.4	1.30
12.4 - 18	1.35

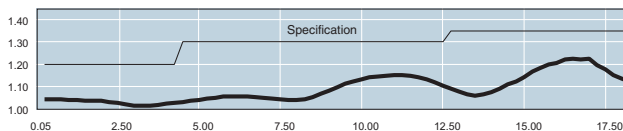

Typical SWR of a 41-10

POWER RATING (mounted horizontally): 10 watts **average (bi-directional)** to 25°C ambient temperature, derated linearly to 1 Watt @ 125°C. 1 kilowatt **peak** (5 μsec pulse width; 0.5% duty cycle).

POWER COEFFICIENT: <0.0015 dB/dB/watt

TEMPERATURE COEFFICIENT: <0.0004 dB/dB/°C

TEMPERATURE RANGE: -55 °C to 125 °C

TEST DATA: Swept data plots of attenuation and SWR from 50 MHz to 18 GHz supplied.


CONNECTORS: SMA (Male/Female) connectors per MIL-STD-348 interface dimensions - mate nondestructively with MIL-C-39012 connectors.

Connector Options	Type/Description
1	SMA, Female
2	SMA, Male

CONSTRUCTION: Black, finned aluminum body, gold plated beryllium copper contacts.

WEIGHT: 28 g (1 oz.) maximum

PHYSICAL DIMENSIONS:

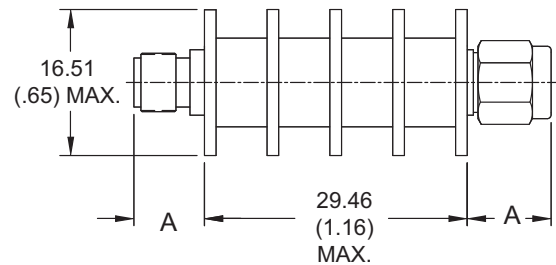


Connector	DIM A
SMA Male	11.18 (0.44)
SMA Female	9.4 (0.37)

NOTE: All dimensions are given in mm (inches) and are maximum, unless otherwise specified.

MODEL NUMBER DESCRIPTION:

Example:

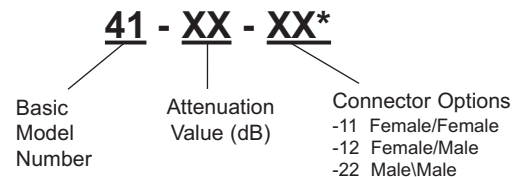

* Unit is bi-directional and full power may be applied to either connector.