

Keysight Technologies


Hybrid Power Dividers

87302C 0.5 to 26.5 GHz

87303C 1 to 26.5 GHz

87304C 2 to 26.5 GHz

[Data Sheet](#)

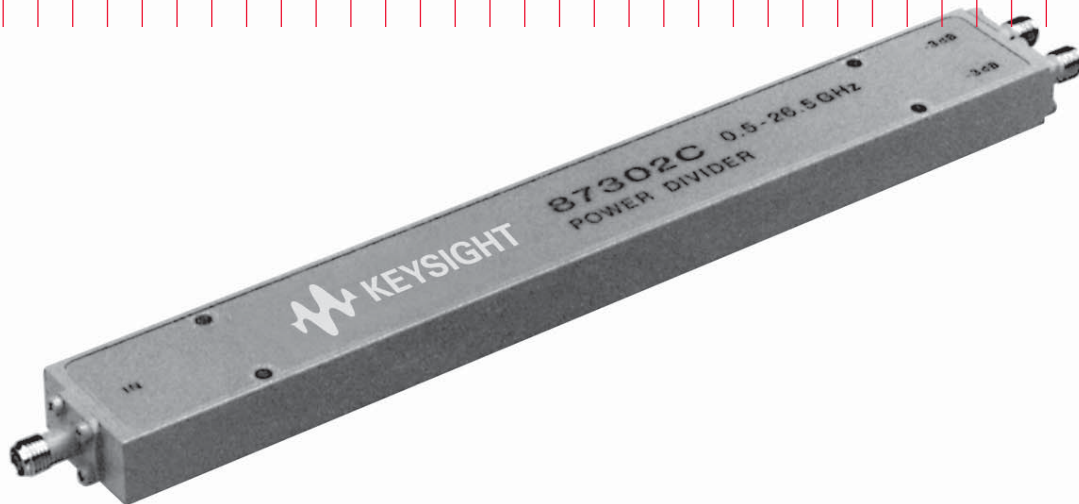

Introduction


Features and Description

The Keysight Technologies, Inc. 87302C, 87303C, and 87304C power dividers are compact, hybrid microwave power dividers designed for power-splitting applications that require a minimal insertion loss and high isolation. The 87302C covers the entire 0.5 to 26.5 GHz frequency range with a maximum insertion loss of 1.9 dB. The 87303C and 87304C restrict the lower frequency limit for further improvement in the insertion loss. The 87303C covers 1 to 26.5 GHz with a maximum insertion loss of 1.6 dB and the 87304C operates from 2 to 26.5 GHz with a worst-case insertion loss of 1.4 dB. Maximum insertion loss of the 87302C, 87303C, and 87304C is in addition to 3 dB coupling loss. All units use industry standard 3.5 mm (SMA compatible) connectors for rugged trouble-free operation.

- High isolation
- Broadband to 26.5 GHz
- Low insertion loss
- Accurate amplitude and phase tracking

Applications

These hybrid power dividers are excellent for any application where two-way power division with high isolation and low insertion loss is required. They typically exhibit an insertion loss that is 1 to 2 dB lower than an equivalent resistive power divider (see Figure 1).

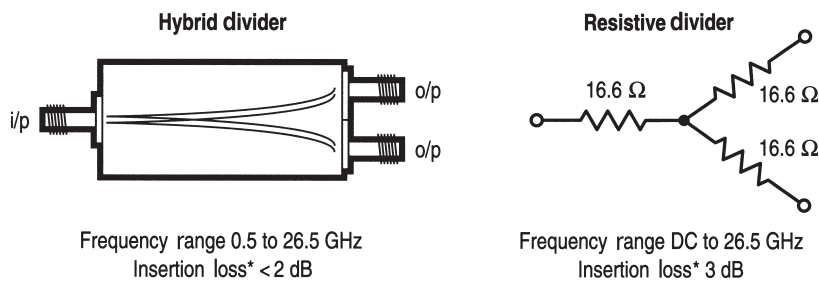

* Plus 3 dB Power division loss

Figure 1. Hybrid power divider.

Product Specifications


Frequency range	Model	Band segment	VSWR	Insertion ¹ loss (db)	Isolation (dB)	Amplitude tracking (dB)	Phase tracking (deg.)
0.5 to 26.5 GHz	87302C	0.5 to 18	1.45	1.5	19	0.3	6
		18 to 26.5	1.60	1.9	19	0.5	10
1.0 to 26.5 GHz	87303C	1.0 to 18	1.45	1.2	19	0.3	6
		18 to 26.5	1.60	1.6	21	0.5	10
2.0 to 26.5 GHz	87304C	2.0 to 18	1.45	1.1	19	0.3	6
		18 to 26.5	1.60	1.4	18	0.5	10

1. Insertion loss is in addition to 3 dB coupling loss

Power rating 10 W, CW (2:1 maximum load SWR)
Connectors 3.5 mm F, (SMA compatible)
Weight 170 g (6 oz) net, 340 g (12 oz) shipping

Note: Amplitude and phase tracking are the ratio of one output in dB or degrees, respectively.

Dimensions

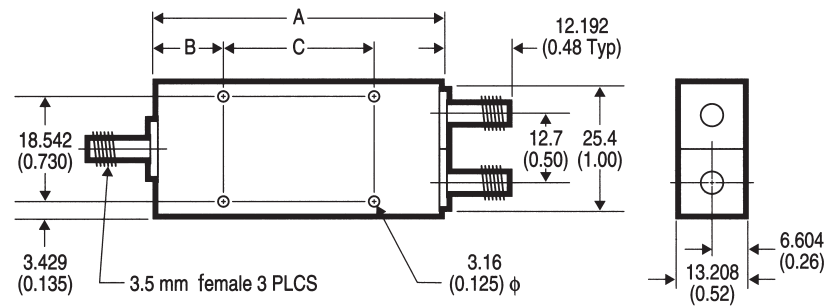


Dimensions are in millimeters and (inches).

Model	Dimensions		
	A	B	C
87302C	196.85 (7.75)	28.702 (1.13)	139.7 (5.50)
87303C	105.41 (4.15)	26.162 (1.03)	2.10 (0.08)
87304C	57.15 (2.25)	28.702 (1.13)	0.00 (0.00)

Technical Performance Curves


87302C

Markers at 0.5 and 18 GHz

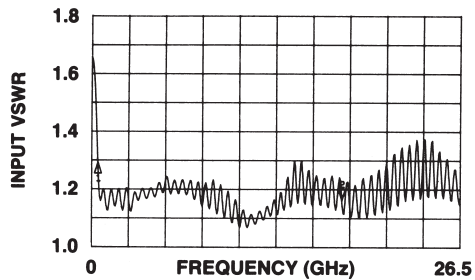

















87303C

Markers at 1 and 18 GHz

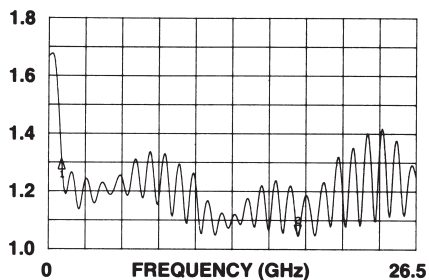

87304C

Markers at 2 and 18 GHz

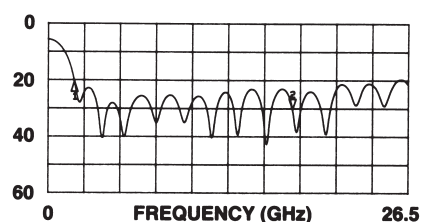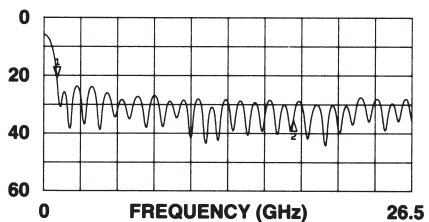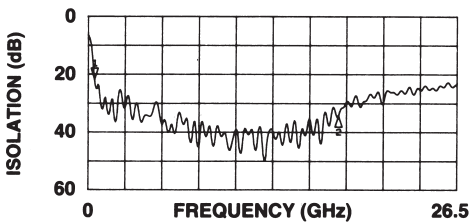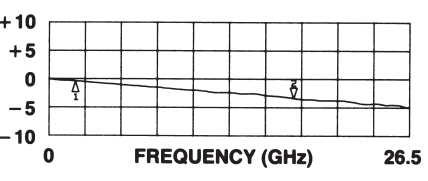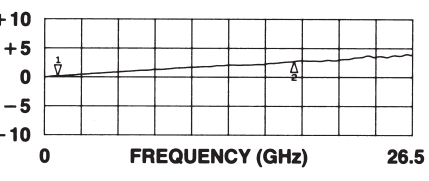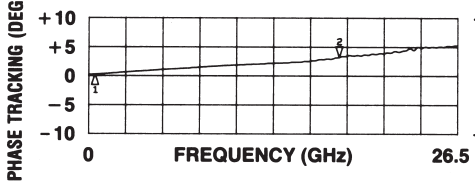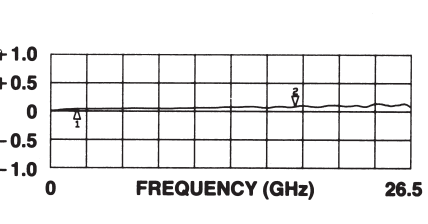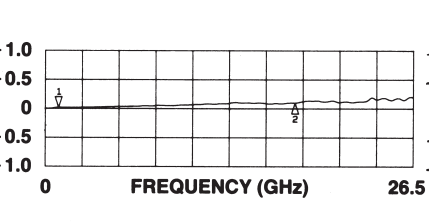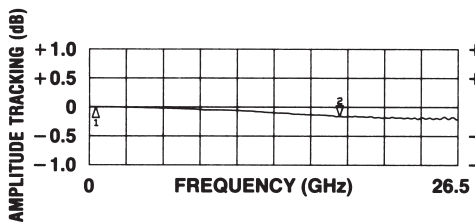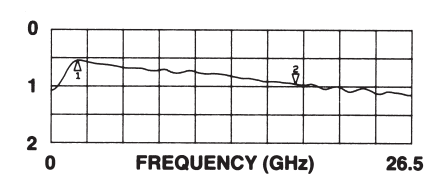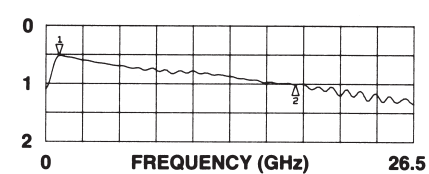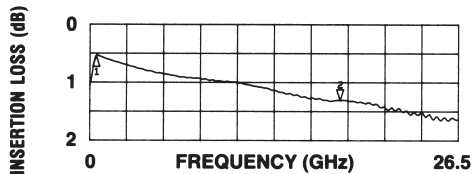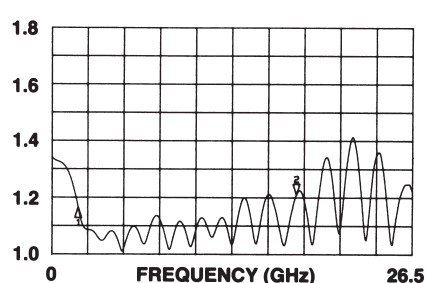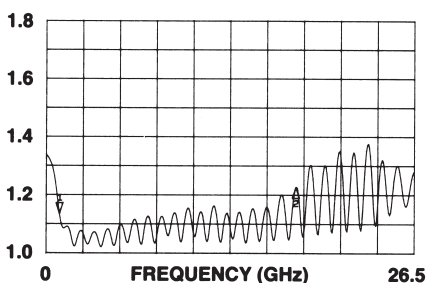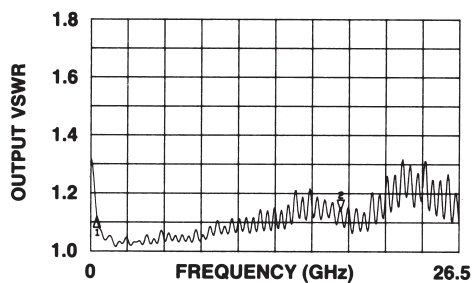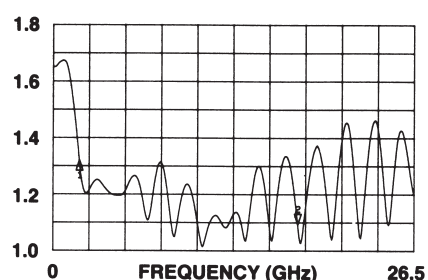

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.



www.axiestandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



www.keysight.com/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2008
Quality Management System

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-07-10-14)

